






 **SPECIFICATIONS - 22W T8 Bypass Tube**

4-foot T8 Type B (ballast bypass) tubes are constructed to work with single-ended or double-ended wiring schemes, which saves time, labor, and money! Tubes are perfect for office spaces, warehouses, hotels, restaurants, and schools.

  
**22W**

  
**2,660 Lumens**

  
**5000K CCT**

APPLICATIONS:


- Office Spaces
- Warehouses
- Hotels
- Restaurants
- Schools

**VIRIBRIGHT**

 (951) 268-7095

 (951) 279-4202


 sales@viribright.us

 355 E Rincon St, Ste 219  
Corona, CA 92879

 www.viribright.com


SPECIFICATIONS	DETAILS
LIFESPAN	50,000 HRS
IP RATING	40
WARRANTY	5 Years
THD	20%
LUMENS	2,660
WATTAGE	22
CCT	4000K 5000K 6000K
CRI	RA>80
LIGHT EFFICIENCY	125 Lpw
DIMMING	No
VOLTAGE	100-277V
POWER FREQUENCY	50/60 Hz
BEAM ANGLE	180°
POWER FACTOR	>0.9
WORKING TEMPERATURE	-40° F - +122° F
CERTIFICATIONS	UL, DLC, FCC, CE, ROHS

**DIMENSION**

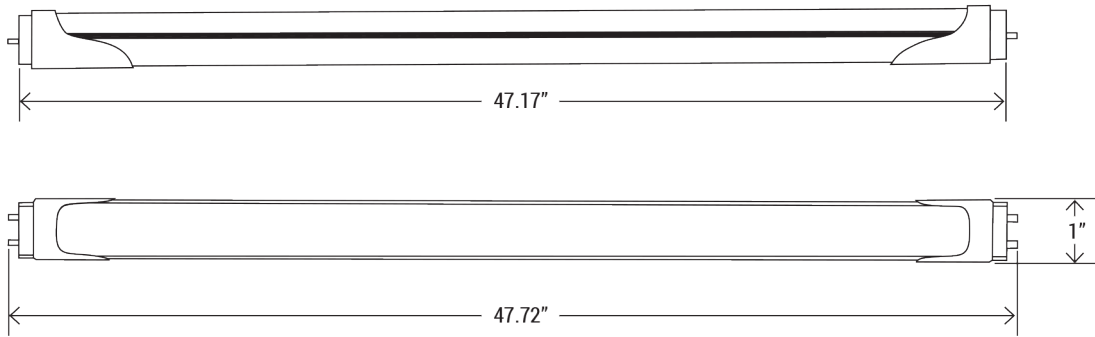

**INSTALLATION DIAGRAM**

You can choose any of the following 8 ways to wire/rewire and install the LED tube.

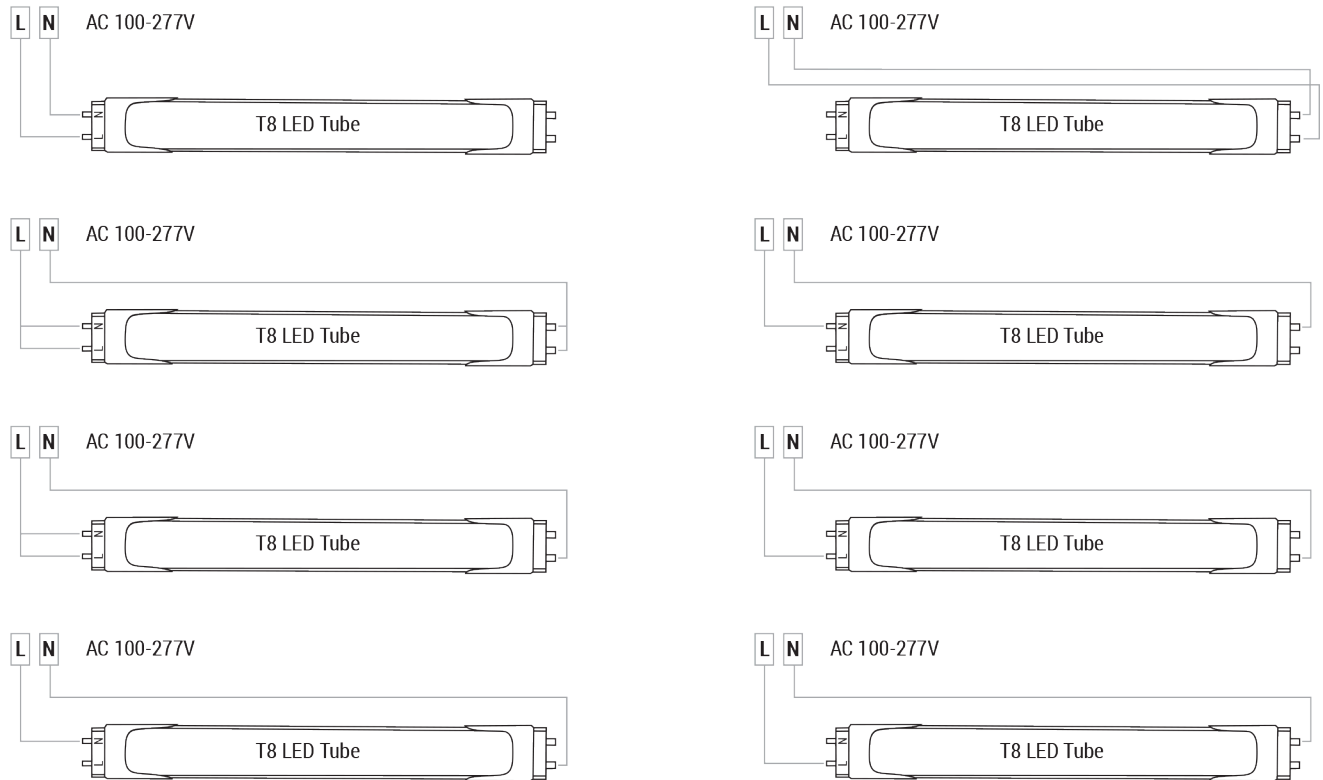

**VIRIBRIGHT**

📞 (951) 268-7095  
 📠 (951) 279-4202  
 ✉ sales@viribright.us

1. Switch off power
2. Remove fluorescent tube
3. Bypass the ballast
4. Install LED tube
5. Switch on power

📍 355 E Rincon St, Ste 219  
 Corona, CA 92879  
 🌐 www.viribright.com

