

Patent Pending
Made in China

V-028A-10

Instruction Manual

VIRIBRIGHT T8 LED TUBE

Caution:


Please read and follow these instructions before installation.

- Install the tube by qualified electrician and technician.
- Consult the competent electrician if you have any uncertainty about the installation or the use of the product.
- Do not impact the tube and all its components by any external weight or mechanical force.
- Do not use sharp tools near or on the surface of the tube.
- Hands must be dry during installation.
- Switch off the power before installation.
- Make sure the base is mounted on a stable, even and secure surface.
- Beware of electric shock when replacing tube.
- Use or store the tubes in dry places. If the tubes are used for outdoor application, waterproof holders and covers are needed.
- Replace the tube immediately if you find any leakage or damage on the tube.
- Stop use and replace if the product becomes dim, out of order or begins to blink.
- If failure occurs, do not attempt to repair product.
- This is not a dimmable product. Do not use with dimmers.

Installation:


1/. Without Ballast and Starter

- Directly connect the wires as shown in diagram 1. Join either A or B, or A & B together with the "Live" wire. Join either C or D, or C & D together with the "Neutral" wire.
- Install the T8 LED tube on the bracket.

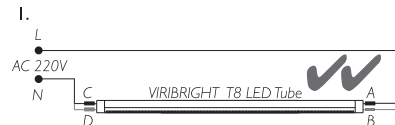


2/. With Inductive Ballast and Starter

- Take off the fluorescent tube and directly replace with the LED tube.
- No need to make any change or remove the inductive ballast and starter.

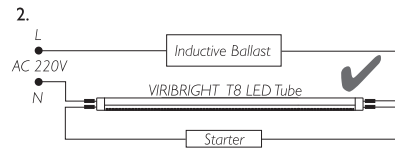


3/. With Electronic Ballast

- Take off the fluorescent tube.
- Cut the wires as shown on the dotted line of the diagram (3b).
- Bypass the ballast and remove the starter (if any) within the bracket.
- Reconnect the wires as shown. Join either A or B, or A & B together with the "Live" wire. Join either C or D, or C & D together with the "Neutral" wire.
- Install the T8 LED tube on the bracket.

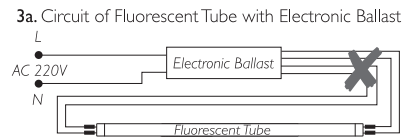

3b. Reconnected circuit of VIRIBRIGHT T8 LED Tube

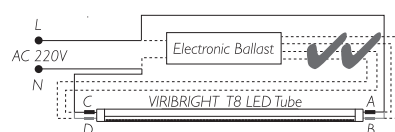

* Direct connections shown in diagram 1 and 3b are recommended as ballast consumes energy and heat.

** DO NOT connect both the "Live" and "Neutral" wires at either end of the bracket.

Hong Kong Office:
Suites 223-231, 2/F, Tsimshatsui Centre, 66 Mody Rd, TST East,
Kowloon.
Tel: (852) 2723-2302 Fax: (852) 2722-1040
Email: lighting@matrix.hk.com

